

101
SIZES
1
2
3
4
5

104
SIZES
1
2
3
4
5

116
SIZES
1
2
3
4
5

119
SIZES
1
2
3
4
5

119
SIZES
3
4

123
40°-70°
SIZES
4

124
15°-60°
(224)
SIZES
2
3
4

125
SIZES
1
2
3
4
5

126
30°-45°
SIZES
2
3
4

127
30°-45°
SIZES
2
3
4

128
SIZES
1
2
3
4
5

129
30°-60°
SIZES
2
3
4

130
30°-45°
SIZES
2
3
4

131
SIZES
1
2
3
4
5

132
SIZES
1
2
3
4
5

133
PLASTIC
SIZES
1
2
3
4
5

134
SIZES
2
3
4

135
SIZES
1
2
4
5

138
SIZES
1
2
3
4

140
SIZES
1
2
3
4

143
SIZES
1
2
3
4

144
SIZES
2
3
4

145
SIZES
2
3
4

146
SIZES
2
3
4

147
SIZES
2
3
4

148
SIZES
1
2
3
4
5

149
SIZES
1
2
3
4
5

150
SIZES
2
3
4

152
4°-10°
(232)
SIZES
2
3
4

153
4°-10°
(201)
SIZES
2
3
4

154
4°-10°
(225)
SIZES
2
3
4

155
4°-10°
(204)
SIZES
2
3
4

156
4°-10°
(219)
SIZES
2
3
4

158
SIZES
1
2
3
4
5


160
SIZES
1
2
3
4
5



TÜV RHEINLAND
 PRODUCT SAFETY
 TYPE APPROVAL
 CERTIFICATE NO: B 06 11 61671 001

 BAUART
 GEPRÜFT
 TYPE
 APPROVED

*Image shows 2 fittings

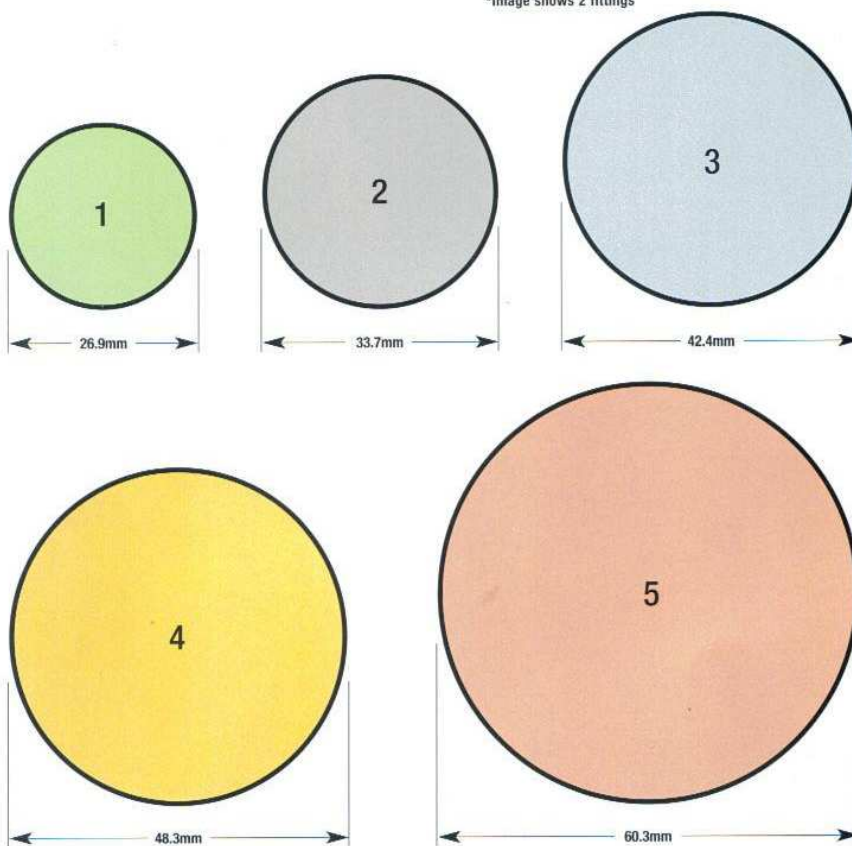

**GALVANISED TUBE IN LENGTHS
 OF APPROX 6.5 METRES.**

GALVANISED BLACKHEART MALLEABLE
 IRON FITTINGS TO BS6681, GRADE B32-10
 WITH GALVANISING TO BS EN 1461:1999

TABLE OF SIZES		
	TUBE DIA MM O/D	NOMINAL BORE
1	26.9	3/4"
2	33.7	1"
3	42.4	1 1/2"
4	48.3	1 1/2"
5	60.3	2"